

WWW.SADDLEMEN.COM

USER GUIDE & INSTALLATION INSTRUCTIONS

DESCRIPTION: Trike Fender Bra

PART NUMBER: 1414-0015

1414-0014

FITMENT:

Harley-Davidson[®] Tri-Glide[®] models 2009-2023

OVERVIEW:

- Supple, leather-grain marine-grade SaddleHyde[™] looks great while keeping the road grime off of your Trike.
- A good, snug fit and special backing provides for light chap contact to the fender surface, helping to prevent rub marks.

Trike Fender Bra, Tattoo Flame

- Cover appearance complements Saddlemen seats and other accessories.
- Available in smooth Saddlehyde or with a 3D Tattoo-style flame embroidery.
- Easy installation does not require any drilling. You simply unscrew the taillights to install.

CONTENTS / PARTS INCLUDED:

1- Fender Chap, left

1- Fender Chap, right

Tools required: #2 or #3 Philips screw driver

IMPORTANT:

READ THESE INSTRUCTIONS THOROUGHLY BEFORE INSTALLATION. All "NOTE," "CAUTION" and "WARNING" notations are serious safety issues and should be read carefully. Possible injury to riders or damage to the motorcycle and/or accessory may result if improperly installed.

NOTICE TO DEALERS:

These instructions contain important information for future reference and should be given to the customer.

A WARNING:

You are responsible for the proper installation of this Saddlemen accessory on your motor vehicle. Your attention to the supplied installation instructions and recommendations will permit safe and proper use of this accessory. You must mount this accessory properly and securely before riding your vehicle. If you lack the ability to safely and properly mount this accessory, seek out a qualified motorcycle technician for assistance. During accessory installation, lock the Trike in place so it will not move and injure you, or damage the vehicle. Using or mounting this accessory improperly could result in a loss of control of the motor vehicle which could result in damage to your vehicle or other personal property, the property of third parties, and/or personal injury to yourself or others up to and including death.

BE SURE TO THOROUGHLY READ AND CLOSELY FOLLOW THE MOUNTING INSTRUCTIONS THAT ARE INCLUDED WITH THIS ACCESSORY:

• The fender chaps must be installed and securely fastened onto fenders of the (three-wheel) motorcycle. For your and your passenger's safety, install the chaps securely so they will not shift or move while riding. Make sure the chaps or the related mounting materials will not contact the controls, wheels, suspension or any other moving parts of your vehicle.

• If you do not understand these instructions DO NOT mount the fender chaps. Remove any portion of the chaps you may have already installed .

• Thoroughly inspect your fender chaps before every ride. Do not use this accessory if the mounting system has been modified, or has deteriorated, loosened or is beginning to fail.

• Continually check the security of the fender chaps at each stop as you ride. Hardware on a motorcycle can loosen during operation, so be sure to check it frequently - your and your passenger's health depends upon your attention to safety.

- Do not use this accessory if you have any doubts as to whether it is properly mounted to your motorcycle.
- When using this or any accessory, do not exceed your vehicle's Maximum Gross Vehicle Weight as listed on your motorcycle or in it's owner's manual.

• If your accessory fender chaps are ever damaged, do not use them until they have been inspected by your local professional motorcycle dealer. Replace the accessory immediately if it has damage that will prevent it from being properly secured to your vehicle.

DO NOT ATTEMPT TO USE THIS ACCESSORY IF:

- You do not understand these installation and use instructions;
- You do not understand any part of the accessory mounting system;
- You have any doubts as to the security of the mounting system.

11-400327 Trike Fender Chap (Rev 1 10-2023)



A WARNING:

If you do not understand the mounting instructions DO NOT mount the accessory, and remove any related items you may have installed on your vehicle. Contact your local professional motorcycle dealer for assistance, or call the Saddlemen support line at (310) 638-1222.

Remember: Motorcycling can be a dangerous activity. Installation of any accessory can increase your risk if it is not installed properly. You are responsible to install this accessory so it will not contact any portion of the drive train, suspension or steering, or if it will in any way interfere with the controls or the operation of your (three-wheel) motorcycle.

INSTALLATION:

outside edge of the fender.

Your Saddlemen Fender Chaps have been designed to mount easily to the rear fenders on certain Harley-Davidson Trikes. By referring to this instruction set you (or your professional motorcycle technician) will need to determine the best mounting method to install this accessory on your motorcycle.

NOTE: Prior to chaps installation make sure your Trike's fenders are clean and waxed. Your chap's soft inner liner will help protect the paint finish if you make sure no dirt or debris is present prior to installation.

IMPORTANT TIP: The chaps will be very snug on the vehicle after installation. Unpack the chaps and allow them to warm and stretch in the sun for a while to aid in installation. When stretching the chaps in place, use two hands and pull gently and evenly so you do not tear the mounting tabs or sleeves that are sewn to the main panels.

(1) Catch the felt-cover bottom hooks on the inner, lower edge of the fender.

NOTE: The felt-covered hooks are bendable. You can adjust the tension of the chaps by adjusting the fit of the hooks. Due to the normal variance of the bodywork, it may require a fitting or two to get the chaps to fit snugly to the vehicle.





(2) Slip the chap over and upwards so the inner sleeve in retained by the lower,

 $\ensuremath{(3)}$ Catch the upper felt-covered hook so it holds the chap to the middle of the fender.

REMINDER: The felt-covered hooks are bendable. You can adjust the tension of the chaps by adjusting the fit of the hooks.

11-400327 Trike Fender Chap (Rev 1 10-2023)



17801 SOUTH SUSANA ROAD, RANCHO DOMINGUEZ, CA 90221 | PH: 310.638.1222

INSTALLATION (continued)

(4) The rear tab at the back of the chap is used to secure the chap on the fender. It is held in place by the taillight mounting screw (5).

Use a #2 Phillips screw driver to remove the two screws that hold the taillight lens to the light housing. After you remove the taillight lens (6) then use a #3 Phillips screw driver to remove the taillight assembly from the fender.

CAUTION: Take care to protect the fender during chap installation. Use painter's tape or a similar protective medium to prevent the taillight or its housing from damaging the fender's paint finish.

(7) Pull the end of the fender chap down so the hole in the retention tab aligns with the taillight retention hole in the fender.

TIP: If you have difficulty getting the retention tab's hole to align with the hole in the fender, adjust the felt-covered hooks so the chap will slide further back on the fender.

CAUTION: Pull evenly and gently on the chap so you do not damage it. It is best to pull on the black SaddleHyde material rather than pulling on the clear retention tab. If you pull too hard on the retention tab you can cause it to tear or separate from the main chap panel. Damage of this kind is not a defect and would not be covered under the Limited Warranty.

(8) Reinstall the taillight mounting screw so the housing is secure on the fender and it holds the back of the chap in place. Reinstall the taillight lens.

NOTE: Verify that your taillight functions properly.

CAUTION:

REMINDER: You can adjust the chap tension on the fender by adjusting the felt-covered hooks. It is not unusual to have to make an adjustment a day or so after installation.


components on the vehicle. Check to be sure that all lights and safety reflectors are visible once the chaps are in place. If the chaps block any side reflectors, place additional reflectors on the exterior sides of your motorcycle where they will be visible. Reflectors with self-adhesive backing are


Repeat the chap installation process on the other fender.

available from motorcycle or automobile supply stores.


11-400327 Trike Fender Chap (Rev 1 10-2023)



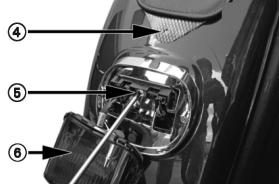

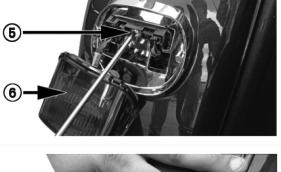

(7)

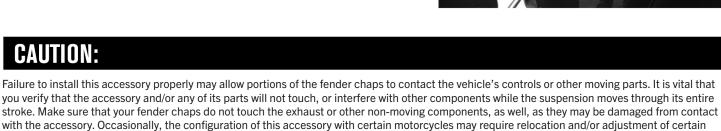

SADDLEMEN*

IMPORTANT:

It is your responsibility to make sure the installation does not create an unsafe or illegal situation. After 50 miles (80 kilometers) of riding, recheck the mounting of the fender chaps to make sure they are still tight and secure. Inspect the chaps for damage before and during each ride. A loose fender chap can interfere with the vehicle's operation and cause an unsafe riding condition.

NOTE:

CARE OF YOUR SADDLEMEN BAG:

Your Saddlemen Fender Chaps require almost no maintenance, other than periodic cleaning with mild soap and water.



WWW.SADDLEMEN.COM

LIMITED WARRANTY POLICY

SADDLEMEN LIMITED ONE-YEAR WARRANTY Saddlemen warrants its products for defects in materials, design or workmanship for a period of one year after retail purchase. Items that are defective will be repaired or replaced by Saddlemen at its sole discretion. Damage caused by improper use or improper installation is not a defect; therefore repair, replacement or shipping of a damaged accessory will not be covered under this warranty. This limited warranty contains other provisions and conditions, so please refer to the Warranty Policy that was provided with your luggage or visit www.saddlemen.com for additional information. You can count on Saddlemen's quality, innovation, service and style. If for any reason you are not satisfied with the performance of your Saddlemen accessories, please contact the Saddlemen support line at (310) 638-1222.



11-400327 Trike Fender Chap (Rev 1 10-2023)