



STANDARD TECH-CONNECT CRADLE KIT FOR '14-'UP FAIRING, LEFT SIDE

1686

Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Tech Connect Cradle
- 1 Fairing Mount
- 1 Flat Washer
- 1 Locknut
- 1 Foam Pad
- 1 Hardware Kit containing:
 - 4 Cable Ties
 - 1 Anti-Seize Packet
- 1 Installation Instructions

YOU WILL ALSO NEED:



Warm, soapy water and a clean rag, set of hex wrenches, set of Torx drivers, set of combination wrenches, socket set and ratchet

NOTICE

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**.
- STEP 2** Locate the Tech Connect Cradle and Fairing Mount; attach the Cradle to the Mount with the included Washer and Locknut.
- STEP 3** Remove the center and clutch-side windshield screws; set them aside for now.
- STEP 4** Gently pry the windshield and fairing back as shown in **PIC 2**.
- STEP 5** Using warm soapy water and a clean rag, remove all dirt and debris from the installation area; allow the area to dry completely.
- STEP 6** Use your fingernail to rub the adhesive backing; this will activate the adhesive. Remove and discard the backing.
- STEP 7** Slide the Mount between the outer fairing and windshield.

Align the Mount hole with the inner fairing screw hole; press it down into place for one minute; full bonding will occur after 24 hours. Remove and discard the masking tape.

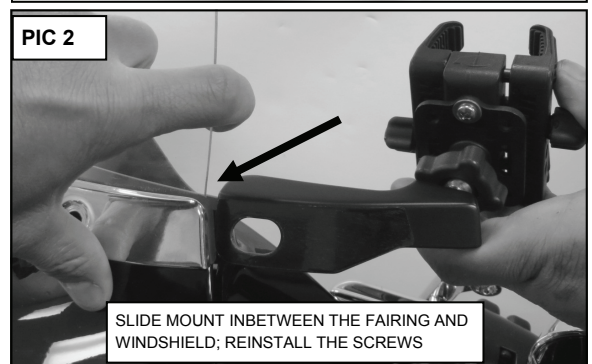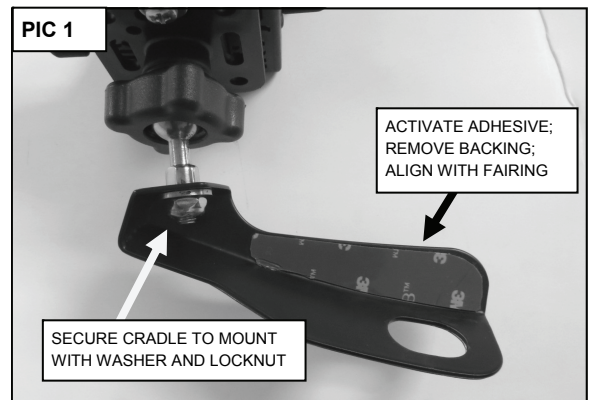



NOTICE

Anti-Seize aids in the future removal of fasteners and helps prevent corrosion. Apply the included Anti-Seize directly to the treads of all installed fasteners. Do not use Anti-Seize on fasteners with thread locking compound applied.

STEP 8 Secure the Mount with the screw removed in **STEP 2**.

STEP 9 Reinstall the center windshield screw.

NOTE: Use the included Cable Ties to secure any cords (charging, audio, etc) leading towards the device in the Tech Connect.

WARNING

BEFORE RIDING, ENSURE THAT THE INSTALLATION OF THIS PRODUCT DOES NOT INTERFERE WITH THE PROPER OPERATION OF THE MOTORCYCLE.

PREVENT DISTRACTED RIDING! DO NOT OPERATE, REMOVE, OR ADJUST THE DEVICE WHILE RIDING. DISTRACTED RIDING CAN CAUSE LOSS OF CONTROL LEADING TO SERIOUS INJURY OR DEATH.

NOTICE

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.